

EASY SERVICING


Wear and tear from prolong use is inevitable. When servicing becomes necessary all components of H-50A are replaceable.




1 ton

10 ton


20 ton

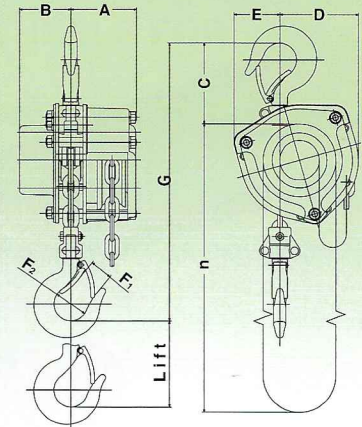

0.5 - 3.2 ton Diagrammatic only

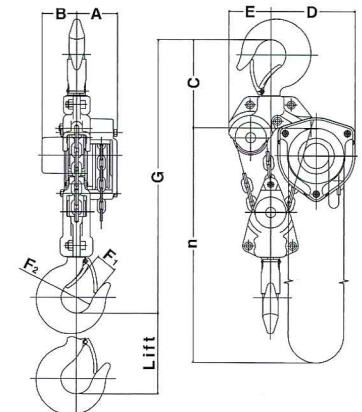

5 - 16 ton Diagrammatic only

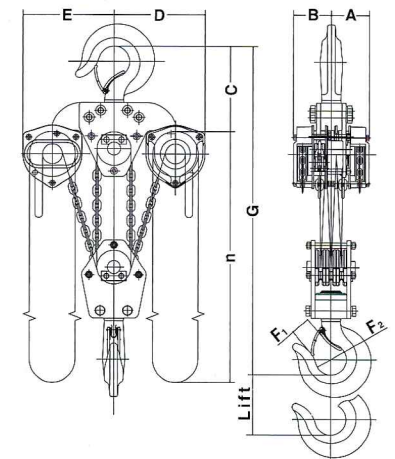

20 ton or more Diagrammatic only

STANDARD SPECIFICATIONS: H-50A Chain Hoist

Item No.	Rated load (ton)	Lift (m)	Load chain		Head room G (mm)	Pulling efforts (N)	Net weight (kg)	Test load (ton)	Major Dimensions (mm)							
			Dia. (mm)	Nos. of falls					A	B	C	D	E	F1	F2	n(m)
HH5005A	0.5	2.5	5	1	260	206	8	0.75	82	56	100	90	48	24	36	2.5
HH5010A	1		6.3	1	300	235	10.5	1.5	84	66	110	100	59	29	43	2.5
HH5015A	1.6		7.1	1	345	289	15	2.4	91	77	120	115	69	33	48	2.5
HH5020A	2	3.0	7.9	1	380	329	21	3.0	99	88	125	132	82	35	52	3.0
HH5030A	3.2		10	1	435	373	30.5	4.8	106	94	140	160	94	40	60	3.0
HH5050A	5		7.1	3	575	353	35	7.5	91	77	200	205	94	47	68	3.1
HH5100A	10	3.5	10	3	790	422	76	12.5	106	94	260	283	122	68	95	3.8
HH5150A	16		10	5	1,040	461	155	20.0	106	94	350	340	212	75	105	4.0
HH5200A	20		10	6	1,080	441×2	250	25.0	153	153	345	390	390	79	125	4.0
HH5250A	25	4.3	10	8	1,100	431×2	≅320	31.3	183	183	345	390	390	79	125	4.0
HH5300A	32		10	10	1,470	461×2	≅440	40.0	213	213	435	400	400	95	135	4.3
HH5400A	40		10	14	1,700	451×2	≅650	50.0	255	255	530	400	400	105	165	4.6
HH5500A	50	4.6	10	20	1,820	461×2	≅850	62.5	328	328	590	400	400	115	180	4.6

N.B. 1. The table shows the standard lifts. Other chain lengths are also available.

The design, materials and specifications are subject to change for improvements without notice.