


Impact Wrenches (Two-Hammer)

- Two hammer impact design for efficient and speedy tightening operation.
- Ideal for assembly line work.

● 9.5mm(3/8")Sq.

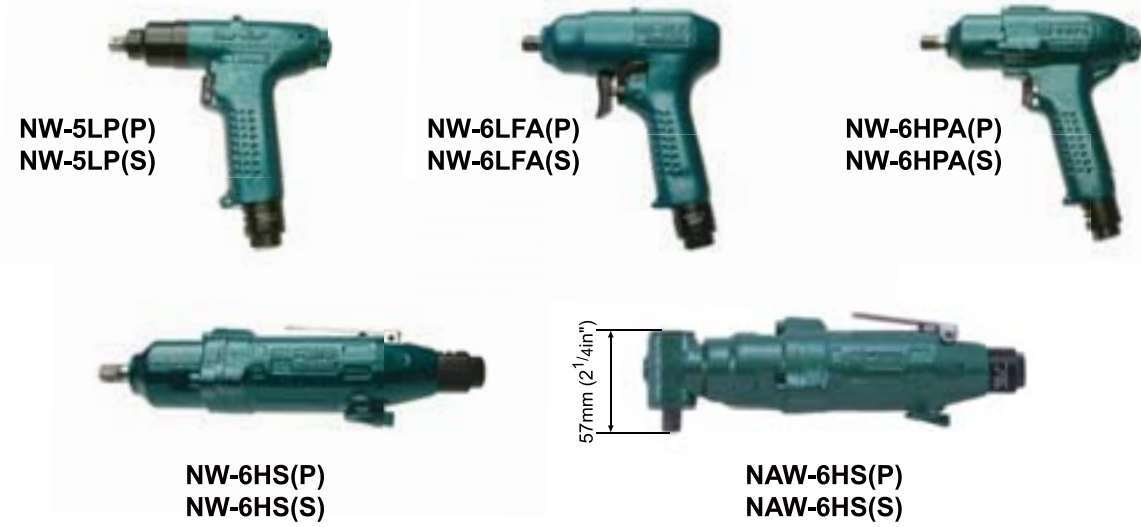

● 12.7mm(1/2")Sq.



● Anvil Type

NW-○○HPA (P)

(P) = Pin Hole Type

(S) = Stopper Pin Type

(R) = Ring Type

9.5mm Sq

12.7mm Sq
19.05mm Sq

Model	Code	Capacity (Bolt size)		Free speed min ⁻¹	Overall length		Mass		Spindle offset		Square shank size		Airinlet thread Rc or NPT	Hose size		Average air consumption	
		mm	in		mm	in	kg	lb	mm	in	mm	in		mm	in	m ³ /min	ft ³ /min
NW-5LP(P)	20097	6	1/4	12000	152	5 ¹⁵ / ₁₆	0.6	1.3	16.5	5/8	9.5	3/8	1/4	6.3	1/4	0.25	8.8
NW-5LP(S)	20652																
NW-6LFA(P)	20982	6~8	1/4~5/16	10000	136	5 ³ / ₈	0.8	1.8	23	7/8	9.5	3/8	1/4	6.3	1/4	0.25	8.8
NW-6LFA(S)	25025																
NW-6HPA(P)	20114	8	5/16	8000	163	6 ³ / ₈	0.9	2.0	24	15/16	9.5	3/8	1/4	6.3	1/4	0.25	8.8
NW-6HPA(S)	25097																
NW-6HS(P)	20108	8	5/16	9000	217	8 ¹ / ₂	0.9	2.0	24	15/16	9.5	3/8	1/4	6.3	1/4	0.25	8.8
NW-6HS(S)	20859																
NAW-6HS(P)	20173	6	1/4	8000	239	9 ³ / ₈	1.5	3.3	14.5	9/16	9.5	3/8	1/4	6.3	1/4	0.25	8.8
NAW-6HS(S)	20315																
NW-8HPA(P)	20126	10	3/8	6500	165	6 ¹ / ₂	1.5	3.3	28	1 ¹ / ₈	12.7	1/2	1/4	6.3	1/4	0.3	10.6
NW-8HPA(S)	25098																
NW-10HPA(P)	20139	12	1/2	6000	169	6 ⁵ / ₈	1.7	3.7	31	1 ¹ / ₄	12.7	1/2	1/4	9.5	3/8	0.35	12.4
NW-10HPA(S)	25099																
NW-14H(P)	20147	16	5/8	5500	196	7 ¹¹ / ₁₆	3.0	6.6	34.5	1 ³ / ₈	12.7	1/2	1/4	9.5	3/8	0.35	12.4
NW-14H(S)	20677																

● 19.05mm(3/4")Sq.



● 25.4mm(1")Sq.



Model	Code	Capacity (Bolt size)		Free speed min ⁻¹	Overall length		Mass		Spindle offset		Square shank size		Airinlet thread Rc or NPT	Hose size		Average air consumption	
		mm	in		mm	in	kg	lb	mm	in	mm	in		mm	in	m ³ /min	ft ³ /min
NW-16S(P)	20149	18	11/16	4500	330	13	5.0	11	38	1 ¹ / ₂	19.05	3/4	3/8	12.7	1/2	0.45	15.9
NW-16HP(P)	20737	18	11/16	5000	220	8 ⁵ / ₈	5.0	11	41.5	1 ⁵ / ₈	19.05	3/4	3/8	12.7	1/2	0.45	15.9
NW-16HP(R)	20738																
NW-16HS(P)	20151	18	11/16	4000	318	12 ¹ / ₂	5.5	12.1	41.5	1 ⁵ / ₈	19.05	3/4	3/8	12.7	1/2	0.45	15.9
NW-19A(P)	20157	20	13/16	4500	346	13 ⁵ / ₈	6.5	14.3	45	1 ³ / ₄	19.05	3/4	3/8	12.7	1/2	0.55	19.4
NW-19A(S)	25718																
NW-22A(P)	20161	22	7/8	4500	383	15 ¹ / ₁₆	7.4	16.3	45	1 ³ / ₄	19.05	3/4	3/8	12.7	1/2	0.6	21.2
NAW-16HS(P)	20362	16	5/8	3500	386	15 ³ / ₁₆	9.6	21.1	30	1 ³ / ₁₆	19.05	3/4	3/8	12.7	1/2	0.45	15.9
NAW-19A(P)	20178	18	11/16	4000	415	16 ³ / ₈	10.6	23.3	31	1 ¹ / ₄	19.05	3/4	3/8	12.7	1/2	0.5	17.7
NW-16HSA(P)	20154	18	11/16	4000	339	13 ³ / ₈	5.8	12.8	41.5	1 ⁵ / ₈	19.05	3/4	3/8	12.7	1/2	0.45	15.9
NW-19AA(P)	20158	20	13/16	4500	390	15 ³ / ₄	7.0	15.4	45	1 ³ / ₄	19.05	3/4	3/8	12.7	1/2	0.55	19.4
NW-22AA(P)	20162	22	7/8	4500	399	15 ¹¹ / ₁₆	8.0	17.6	45	1 ³ / ₄	19.05	3/4	3/8	12.7	1/2	0.6	21.2
NW-32LA(P)	20166	33	1 ⁵ / ₁₆	4000	383	15 ¹ / ₁₆	10.7	23.5	55.5	2 ³ / ₁₆	25.4	1	1/2	12.7	1/2	0.85	30.0
NW-38(P)	20170	39	1 ⁹ / ₁₆	3000	463	18 ¹ / ₄	15.3	33.7	62.5	2 ⁷ / ₁₆	25.4	1	1/2	12.7	1/2	0.9	31.8
NAW-32LA(P)	20180	22	7/8	3500	484	19 ¹ / ₁₆	18.0	39.6	43	1 ¹¹ / ₁₆	25.4	1	1/2	12.7	1/2	0.85	30