

Concrete Breakers / Digger

Cleaner

Concrete Breakers

- Durable and low reaction breakers for demolition of concrete, building, asphaltic pavement, and for removal of slug in a furnace.



*Chisel not included.

Model	Code	Blow per minute	Piston diameter		Piston stroke		Overall length		Mass		Air inlet thread	Hose size		Average air consumption	
		min ⁻¹	mm	in	mm	in	mm	in	kg	lb	G	mm	in	m ³ /min	ft ³ /min
CB-15B	30430	1300	38	1 1/2	130	5 1/8	499	19 5/8	13.5	29.7	1	19.0	3/4	1.4	49.4
CB-20A	30002	950	38	1 3/4	150	5 15/16	555	21 7/8	20.0	44.1	1	19.0	3/4	1.2	42.4
CB-30B	30459	850	45	1 3/4	165	6 1/2	595	23 7/16	28.5	62.8	1	19.0	3/4	1.4	49.4

Option chisels for Concrete Breakers

Model	Chisel	Code No.
CB-15B		400 mm 17508320
		600 mm 15410140
CB-20A		400 mm 17504670
		600 mm 15410150
CB-30B		470 mm 17504930

Option muffler



Digger

- Light weight and easy to operate.
- Suitable for scaling concrete and for digging soil.



DIG-9


*1 chisel included.

Option chisel for digger

Model	Chisel	Code No.
DIG-9		17508840

Model	Code	Blow per minute	Piston diameter		Piston stroke		Overall length		Mass		Air inlet thread	Hose size		Average air consumption	
		min ⁻¹	mm	in	mm	in	mm	in	kg	lb	Rc or NPT	mm	in	m ³ /min	ft ³ /min
DIG-9	30014	1500	42.8	1 11/16	63.5	2 1/2	478	18 13/16	8.8	19.4	3/8	12.7	1/2	1.1	38.8


- Powerful and compact design.
- Has no moving parts, is durable and tough.
- No concern on electrification or electric leak.
- 1 narrow nozzle included.

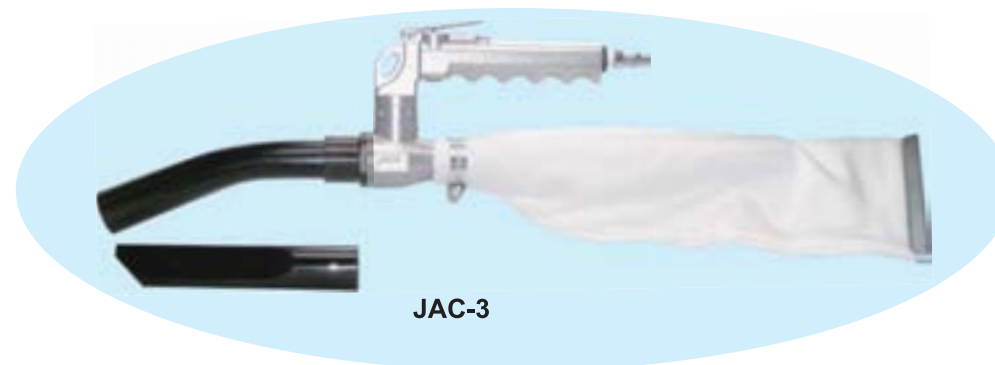


JAC-3



Handle angle is changeable.

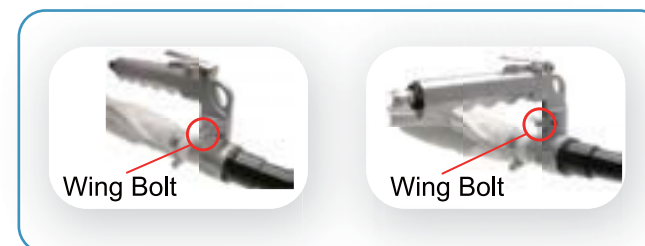

Nozzle Dimension

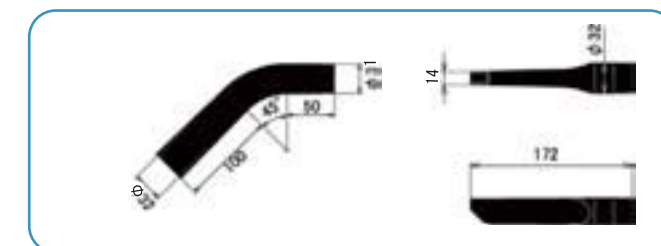


Model	Code	Sucking	Overall length		Mass		Suction hose diameter		Air inlet thread	Hose size		Average air consumption	
		mmAq	mm	in	kg	lb	mm	in	Rc or NPT	mm	in	m ³ /min	ft ³ /min
JAC-3	15336	2200	230	9 1/16	0.77	1.7	32	1 1/4	1/4	9.5	3/8	0.8	28.3

Option for JAC-3 Dust and Liquid Cleaner

- Dust and liquid are collected in a pail can.
- Insert JAC-2 or JAC-3 into JAC-P to start.
- Optional auto-stopper prevents overflow.

Combination of below [1] + [2] + [3] + [4]

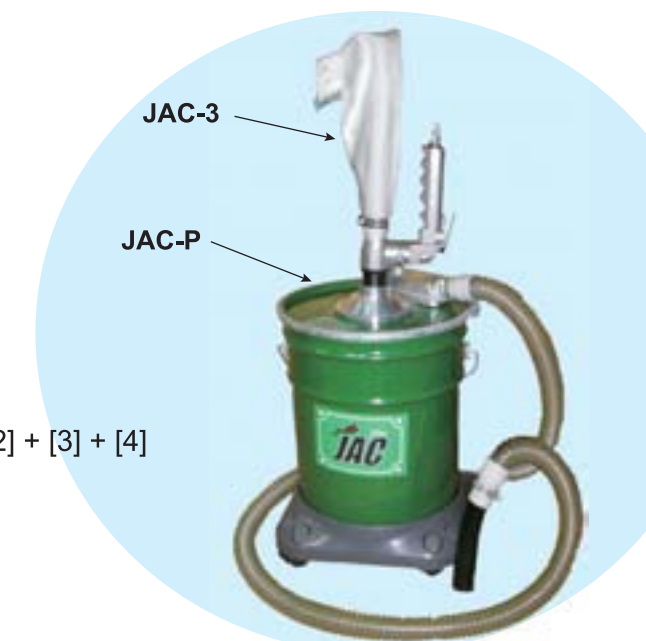

JAC-P & Option Accessories

